ADDENDUM 1

TO: PROSPECTIVE BIDDERS HOLDING PLANS AND SPECIFICATIONS FOR GORALEIGH PASSENGER AMENITY IMPROVEMENTS - SET 9

RE: GORALEIGH PASSENGER AMENITY IMPROVEMENTS – SET 9 ADDENDUM NO. 1

The following changes and clarifications are applicable to the referenced project and are now a part of its contract documents. Where any article, division, or subparagraph of the original contract documents or other addenda is supplemented herein, the provisions of the original documents shall remain in effect. All the supplemental provisions shall be considered as added thereto. Where any such article, division, or subparagraphs are amended, voided, or superseded thereby, the provisions of such article, division, or subparagraph not so specifically amended, voided, or superseded shall remain in effect.

The attention of each contractor is called to the following clarifications, additions to, and changes in the plans sealed April 21, 2025 and specifications and contract documents issued on April 25th, 2025 for the above project. It will be the responsibility of each contractor to call such clarifications, additions, and changes in plans and specifications to the attention of subcontractors concerned. The City in no way assumes any responsibility for notifying any subcontractor, material dealers, or others not having received the original contract documents.

Item 1: Revised Schedule of Prices

Replace Page BP-1 with Page "BP-1 Addendum No. 1". Bidders shall use schedule of prices provided with Addendum No. 1 for pricing proposed. Original Page BP-1 with strikethroughs will not be accepted.

Item 2: Revised Special Provision No. 26

Replace Page 19000-12 with Page "19000-12 Addendum No. 1". Bidders shall use "AMENITY ITEMS & MODELS TO BE INSTALLED" of project special provisions Addendum No. 1 for bidding.

Item 3: Added Special Provision No. 41A

Replace Pages 19000-21 and 19000-22 with Pages "19000-21 Addendum No. 1" and "19000-22 Addendum No. 1" respectively. Bidders shall use "RELOCATION OF WATER METERS" of project special provisions Addendum No. 1 for bidding. Line item 28 has been renamed to "RELOCATE WATER METER".

Item 4: Revised Project Certification

Replace Page 2 of Project Specifications with attached Engineer's certification of project plans and specifications.

Item 5: Q/A

Questions and answers:

Q1: Please confirm that the foundations for the Tolar shelters will require anchor bolts embedded in the

ADDENDUM 1

foundations. Assuming that they are required per detail, will the contractor be required to furnish these items? A1: Anchor bolts will be required to be embedded in foundations for Tolar shelters. Contractor will be required to furnish anchor bolts for the Tolar shelters.

Q2: Understand that Federal Requirements will involve certified payrolls. Please confirm.

A2: Correct. Certified payrolls for prime and sub-contractors will be required.

Q3: Does the 16' Tolar Shelter require the same type of footing as the 25' Tolar Shelter?

A3: 16' Tolar Shelter does not require footings as shown in plans and appendix materials.

Q4: Is the prime bidder required to purchase bid documents (plans and specifications) and be registered as a plan holder from Accent Imaging to bid the project?

A4: Purchasing bid documents and being registered with Accent Imaging is not required for eligibility to bid on this project.

Q5: Plan Sheet 319.1 calls out a water meter relocation...I don't see a bid item on the Itemized Proposal. Can a bid item be added for this? And we assume the meter is to be extended to be located outside of the sidewalk construction. Is that correct?

A5: Item 28 (Relocate Utility Box/Vault) was attributed to the water meter relocation on Site 319. Bid tab and project special provisions revised as part of Item 1 & 3 of this addendum.

Q6: Plan Sheet 319.1 and Plan Sheet 320.2 calls out shelter removal and return to the owner. Also trash cans are to be returned as well. Are these items to be paid as demolition?

A6: The shelter and trash can removals on plans are to be paid as part of demolition line item.


Q7: Item 28 of the Itemized Proposal calls out Relocate Utility Box/Vault. Can you reference a specific site? And is the utility owner responsible to relocate and we coordinate or will the contractor be responsible for relocation? A7: Item 28 (Relocate Utility Box/Vault) was attributed to the water meter relocation on Site 319. Bid tab and project special provisions revised as part of Item 1 & 3 of this addendum.

ATTACHMENTS

- Revised Schedule of Prices
 - o Replace BD-1 with BD-1 Addendum No. 1 5-14-25
- Revised Section 19000-12 Revised Project Special Provision 26 (AMENITY ITEMS & MODELS TO BE INSTALLED).
- Revised Section 19000-21 & 19000-22 Added Special Provision 41A (RELOCATION OF WATER METERS)
- Revised Engineer's Certification of Project Plans and Specifications.

Contractor shall acknowledge receipt of addendum on the Bid-Proposal Cover sheet in the contract documents.

END OF ADDENDUM #1



Michael P. Dioquino, P.E. – Transportation Design Engineer, DRMP, Inc.

5/14/2025

Date of Issuance

CERTIFICATION

I HEREBY CERTIFY THAT THE ADDENDUM NUMBER 1 SPECIFICATIONS AND PLAN REVISIONS CONTAINED HEREIN WERE PREPARED BY ME OR UNDER MY DIRECT SUPERVISION.

SIGNED, SEALED, AND DATED THIS 14TH DAY OF MAY, 2025.



ITEMIZED PROPOSAL / SCHEDULE OF PRICES - BASE BID

GoRaleigh Passenger Amenity Improvements - Set 9

Addition of bus stop and site amenities to bus stop locations generally consisting of grading, concrete pads and sidewalks, installing amenities, and other related items.

Item No.	Sect No.	Item Description	Unit	Quantity	Unit Bid Price	Amount Bid
1	NCDOT 800	MOBILIZATION/TRAVEL TIME	LS	1		
2	COR 19000/NCDOT 200	DEMOLITION	LS	1		
3	COR 04000	EARTHWORK	LS	1		
4	COR 16000/19000	EROSION CONTROL	LS	1		
5	COR 14000	TRAFFIC CONTROL	LS	1		
6	COR 19000/NCDOT 1205	PAVEMENT MARKINGS	LS	1		
7	COR 19000	GRASS SOD / MULCH	SY	1100		
8	COR 08000	1.5" S.9.5C	SY	35		
9	COR 08001	FULL DEPTH ASPHALT PAVEMENT (12")	SY	45		
10	COR 08000	ASPHALT PLANT MIX PAVEMENT REPAIR (CONTINGENCY)	TON	1		
11	COR 07000	4" CONCRETE SIDEWALK	SY	725		
12	COR 07000	6" CONCRETE SIDEWALK	SY	65		
13	COR 07000/19000	6" SHELTER PAD	SY	95		
14	COR 07000/19000	8" SHELTER PAD	SY	130		
15	COR 19000	REMOVE & REPLACE 4" SIDEWALK	SY	85		
16	COR 07000	2'-6" CURB & GUTTER	LF	150		
17	COR 07000	CURB RAMP	EA	5		
18	COR 19000	CIP GRAVITY RETAINING WALL	SF	300		
19	COR 19000	PEDESTRIAN SAFETY RAIL	LF	95		
20	COR 19000	STEEL PIPE BOLLARDS	EA	12		
21	COR 19000	INSTALL SHELTER & AMENITIES	EA	2		
22	COR 19000	INSTALL (16') TOLAR SIGNATURE CANOPY SHELTER & AMENITIES	EA	3		
23	COR 19000	INSTALL (25') TOLAR SIGNATURE CANOPY SHELTER & AMENITIES	EA	1		
24	COR 19000	INSTALL DUO-GARD ENHANCED SHELTER AND AMENITIES	EA	2		
25	COR 19000	FUNRISH & INSTALL BIKE RACK	EA	10		
26	COR 19000	RELOCATE SIGN	EA	14		
27	COR 19000	ADJUST UTILITY BOX/VAULT	EA	5		
28	COR 19000	RELOCATE WATER METER	EA	1		
	BASE BID SUBTOTAL					
	10% CONTINGENCY OF BASE BID SUBTOTAL BASE BID TOTAL (=BASE BID SUBTOTAL + 10% CONTINGENCY)					

ALL UNIT PRCIES, EXTENSIONS, AND TOTAL BID AMOUNTS ARE MANDATORY. OMISSION OF ANY PRICES, EXTENSIONS, OR TOTAL BID AMOUNTS SHALL RESULT IN THE REJECTION OF THE BID. UNIT PRICES FOR ADD ALTERNATE ITEMS SHALL BE THE SAME AS THOSE LISTED ON THE BASE BID, EXCEPT FOR ITEMS TO PAID BY LUMP SUM. THE UNIT PRICES FOR THE ITEMS IN THE CONTRACT ARE FOR FURNISHING, INSTALLING, COMPLETING, HAVING IN PLACE, AND BEING ACCEPTED UNLESS OTHERWISE NOTE: NOTED.

	CONTRACTOR:	
BP-1	LICENSE NO.:	
JM No.1 5-14-2025	SIGNATURE:	

shelter shall also include the concrete footings with anchor bolts, rebar, and other items required to install the shelter and footings to manufacturer specifications and requirements or as otherwise indicated on the plans. Manufacturer drawings for the Tolar Signature Canopy shelter are included in the Appendix of these specifications.

Install Bench & Amenities payment will be made at the unit price per each bench to be installed at bus stop locations that do not have a shelter to be installed or as otherwise indicated on the itemized proposal and shall include all transportation, assembly, installation and incidentals required to install the specified bench model (Brasco, Jericho Palm, Simme-Seat, among others) and other amenities (trash cans, charging stations, etc.) as shown on the plans at the specified bus stop location.

Install Trash & Recycling Receptacles payment will be made at the unit price per each site where trash and recycling receptacles are to be installed without an accompanying shelter or bench or as otherwise indicated on the itemized proposal; and shall include all transportation, assembly, installation and incidentals required to install the specified receptacle models as shown on the plans at the specified bus stop location.

26. AMENITY ITEMS & MODELS TO BE INSTALLED

The following table is a report of the amenities to be installed per the specifications of this contract. The model of amenities to be installed at any site is subject to change upon City and Engineer discretion prior to installation and concrete work by the Contractor at each location.

Shelter Model Legend

Jericho Palm (G) = Jericho Palm Shelter ("Red Shelter") with Glass Walls

Jericho Palm (P) = Jericho Palm Shelter ("Red Shelter") with Perforated Metal Walls

Brasco Slimline (C) = Brasco Slimline Shelter with Cantilevered Roof

Brasco Slimline (F) = Brasco Slimline Shelter with Standard Roof

Tolar Canopy (16') = Tolar Canopy Shelter 16' Long x 9' Wide

Tolar Canopy (25') = Tolar Canopy Shelter 25' Long x 9' Wide including Specified Footings

Duo-Gard Alton = Duo-Gard Alton Shelter including Specified Footings

Site #	Shelter Model	Bench Model	Trash Receptacle Model	Other Items
304	Jericho Palm (G)	Jericho Palm	Jericho Palm Zoid	-
309	Jericho Palm (G)	Jericho Palm	Jericho Palm Zoid	-
312	Tolar Canopy (25')	Tolar Mesa 6'	Jericho Palm Zoid Double	Tolar Mesa 6'
				Lean Rail
319	Tolar Canopy (16')	Tolar Mesa 6'	Jericho Palm Zoid Double	-
320	Tolar Canopy (16')	Tolar Mesa 6'	Jericho Palm Zoid Double	-
321	Duo-Gard Alton	Duo-Gard 5'	Jericho Palm Zoid Double	-
323	Tolar Canopy (16')	Tolar Mesa 6'	Jericho Palm Zoid Double	-
325	Duo-Gard Alton	Duo-Gard 5'	Jericho Palm Zoid Double	-

27. FURNISH AND INSTALL BIKE RACKS

The Contractor shall be responsible for furnishing bike racks and corrals for installation at locations shown on the plans. The bike racks and corrals are to be installed per the manufacturer's recommendations. The Contractor shall provide required anchor units and other incidentals to install the bike racks and corrals on concrete or asphalt per manufacturer requirements.

The Contractor is to provide a drawing submittal of the bike racks and corrals to be furnished to the Engineer for review and approval prior to installation. Bike racks furnished shall meet the specifications

40. ADJUSTMENT OF MANHOLES

The Contractor's attention is directed to Section 858-3 of the latest version of the *NCDOT Standard Specifications for Roads and Structures*.

The use of cast iron or steel fittings in the adjustment of manholes will not be permitted on this project except where it is considered by the Engineer to be in the best interest of the Department to allow rings to be used. When rings are permitted for the adjustment of manholes, the rings shall have satisfactory bearing on the existing manhole frames and 50 percent of the circumference shall be tack welded at four equally spaced locations as directed by the Engineer. If the existing covers do not fit the rings, furnish, and install new covers at no additional expense to the City. The Contractor shall be responsible for the removal, maintenance, and replacement of manhole rings and covers. Upon removal of the manhole rings and covers, the City or its representative shall inspect them for defects or damage.

Unless otherwise stipulated in the Contract Documents, the Contractor shall only be compensated one time for the adjustment of each manhole as called out in the construction drawings. Any additional adjustments required by the Contractor beyond the first adjustment of a manhole will be the responsibility of the Contractor at no additional cost to the City.

Refer to Section 8000 of these specifications for additional information and methods of measurements and payments.

41. ADJUSTMENT OF VALVE BOXES AND METER BOXES

The Contractor's attention is directed to Article 858-3 of the latest version of the *NCDOT Standard Specifications for Roads and Structures*.

Cast iron or steel fittings will not be permitted for the adjustment of meter boxes and valve boxes on this project. The Contractor shall be responsible for the removal, maintenance, and replacement of valve boxes and water meter boxes. Upon removal of the above-mentioned items, the City or its representative shall inspect them for defects or damage.

Unless otherwise stipulated in the Contract Documents, the Contractor shall only be compensated one time for the adjustment of each valve box or meter box as called out in the construction drawings. Any additional adjustments required by the Contractor beyond the first adjustment of a valve box or meter box will be the responsibility of the Contractor at no additional cost to the City.

Refer to Section 8000 of these specifications for additional information and methods of measurements and payments.

41A. RELOCATION OF WATER METERS

The Contractor's attention is directed to Article 1515 of the latest version of the *NCDOT Standard Specifications for Roads and Structures*.

Contractor to relocate water meter horizontally at the right-of-way line, behind sidewalk using the appropriate materials to place the item into working order. Contractor to coordinate with City of Raleigh Water Department and adjacent property owner prior to work being preformed on water meters. Contractor to coordinate inspection with City of Raleigh Water Department for approval prior to reconnection of water services and backfilling.

All water mains shall be tested, cleaned, and disinfected in accordance with the City of Raleigh specifications prior to connecting new services or existing mains.

Cast iron or steel fittings will not be permitted for the relocation of water meters on this project. The Contractor shall be responsible for the removal, maintenance, and replacement of water meter boxes. Upon removal of the above-mentioned item, the City or its representative shall inspect them for defects or damage.

Unless otherwise stipulated in the Contract Documents, the Contractor shall only be compensated one time for the relocation of each valve box or meter box as called out in the construction drawings. Any additional relocations required by the Contractor beyond the first relocation of a valve box or meter box will be the responsibility of the Contractor at no additional cost to the City.

Payment for *Relocate Water Meter* will be measured and paid per each water meter relocated in working order. The price per each water meter relocation includes all labor, material, testing, and all incidentals required to construct and install the water meter. Coordination with the City of Raleigh is considered incidental to this line item.

42. MINIMUM SEPARATIONS

Minimum separations between existing and proposed utilities shall be as specified in the City of Raleigh Public Utilities Handbook and Details. If utility separation conflicts occur during construction, the Contractor shall coordinate required adjustments with the Engineer prior to proceeding with the work.


43. UTILITY TRENCHES

Contractor shall ensure all utility trenches are backfilled to comply with Section 10000 of these specifications. The City will selectively test trench compactions, but the Contractor shall be held financially responsible for remedial repairs of any settlement or other failures associated with utility installations to meet the City of Raleigh or NCDOT requirements for final acceptance.

All costs associated with the placement of washed stone bedding shall be considered incidental to the installation of storm drainage pipe per Section 10000, Part 1D.

I HEREBY CERTIFY THAT THE SPECIFICATIONS CONTAINED HEREIN AND THE ACCOMPANYING PLANS WERE PREPARED BY ME OR UNDER MY DIRECT SUPERVISION UNLESS NOTED OTHERWISE BY A SIGNATURE AND SEAL FROM ANOTHER REGISTERED ENGINEER ON THESE PROJECT SPECIFICATIONS AND PLANS.

SIGNED, SEALED, AND DATED THIS 14th DAY OF MAY , 20 25

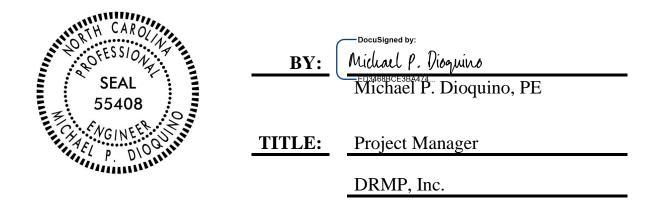

Project Name: GoRaleigh Passenger Amenity Improvements – Set 9

Project No.: 274- SET9ETP-2025